

Clamshell Lobster



Special equipment for working with heavy stone blocs

Patented holding device (load held for more than 30 min when engine is turned off)

Interlocking fingers

Form locking, load enveloping construction with extended volume

Convertible into demolition- and sorting grapple with mammut shells

Endless hydraulic rotation

Made from WHD 450 special wear resisting steel


Hardened knobs prevent load from gliding off (optional)



Quality without Compromise.

Technical details

Model overview:	Lo 2.0	Lo 2.5	Lo 3.0	Lo 4.0	Lo 6.0	Lo 6.5	Lo 7.0
measurements, mm							
shell width (A)	820	900	1000	1000	1300	1350	1550
height without adapter (B)	1265	1200	1275	1275	1480	1920	2360
Max opening (C)	1550	1700	1860	1860	2400	2900	3400
inner height closed (D)	530	530	620	620	950	1100	1400
weight, kg	1020	1320	1960	2060	3050	4800	7000
stone weight max. to closing force, to	4	6	7	7	12	12	14
	4	5	6	6	10	11,5	13
hydraulic data:							
open/close, max. bar	320	350	350	350	350	350	350
open/close, l/min	40 - 80	40 - 80	70 - 120	70 - 120	120 - 200	150 - 250	250 - 400
rotate, max. bar	320	200	200	200	200	200	200
rotate, l/min	20 - 25	20 - 25	20 - 25	20 - 25	20 - 25	20 - 25	20 - 25
excavator weight, to	10 - 14	14 - 20	20 - 27	24 - 32	32 - 46	46 - 70	70 - 90

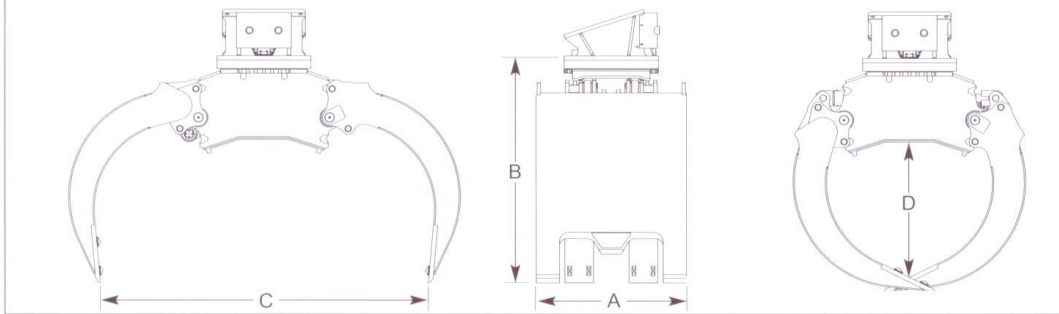

All rights and errors reserved

Version 0307

WIMMER Hartstahl GmbH.&Co.KG. und WIMMER Felstechnik GmbH.
 Industriestraße 3, A-5303 Thalgau, AUSTRIA, Tel.: ++43 (0)6235 6655 0, Fax.: ++43 (0)6235 6655 18
 WIMMER Canada Inc., 9999, Boul. Parkway, Anjou, (QC) CANADA H1J 1P7, Tel.: ++ 514 355 64 24
 Wimmer Budejovice, Ruldolfovská 170 a, 37 001 České Budejovice, Tel.: ++420 387 203 735, Fax ++420 387 203 735

www.wimmer.info office@wimmer.info

Auth. WIMMER Dealer



Quality without Compromise.

تهران : بلوار نلسون ماندلا (جردن) , خیابان ناهید غربی , پلاک ۵۶

۰۵ ۲۶۲۱۹۹۰۳ ۰۲۱