

Pulverizer 950/1050



High performance special tool for pulverizing

With 360° hydraulic rotation or fixed

Oil supply for rotation unit by integrated couplers of the A-Lock

Exchangeable, turnable cutting edge for reinforcement steel

Jaw enforced with surface layer welding

Steel in Hardox quality




Quality without Compromise.



Technical details

| Model: | FU 950 | FU 1050 |
|------------------------------------|---------------------------------|---------------------------------|
| Max. opening | 950 mm | 1050 mm |
| Depth of bite | 850 mm | 890 mm |
| Jaw width | 540 mm | 600 mm |
| Hydraulic data: | | |
| Max. breaking force at 350 bar | 131 to | 175 to |
| Open - close | max. 350 bar, max. 240 l/min | max. 350 bar, max. 275 l/min |
| Rotation | max. 200 bar @ 20-25 l/min | |
| Data of cutting edge: | | |
| Opening in the middle of the edge | 307 mm | 330 mm |
| Length of cutting edge | 160 mm | 175 mm |
| Cutting force (middle of the edge) | 202 to | 284 to |
| weight: | | |
| Turnable models | 2.010 kg | 2.800 kg |
| Excavator weight | > 20 to | > 30 to |
| Fixed models | 1.750 kg | 2.500 kg |
| Excavator weight | > 18 to | > 28 to |

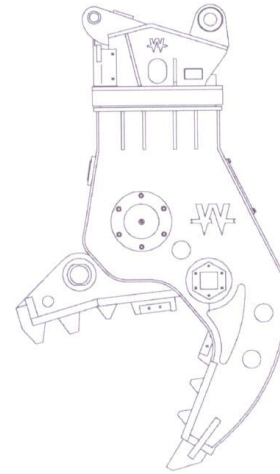

All rights and errors reserved.

Version 0307

WIMMER Hartstahl GmbH.&Co.KG. und WIMMER Felstechnik GmbH.
 Industriestraße 3, A-5303 Thalgau, AUSTRIA, Tel.: +43 (0)6235 6655 0, Fax.: +43 (0)6235 6655 18
 WIMMER Canada Inc., 9999, Boul. Parkway, Anjou, (QC) CANADA H1J 1P7, Tel.: + 514 355 64 24
 Wimmer International CZ s.r.o., Rudolfovská 170 a, 370 01 České Budějovice, Tel.: +420 387 203 735, Fax +420 387 203 736

www.wimmer.info office@wimmer.info

Auth. WIMMER Dealer:



Quality without Compromise.