


WIMMER Oilmaxx

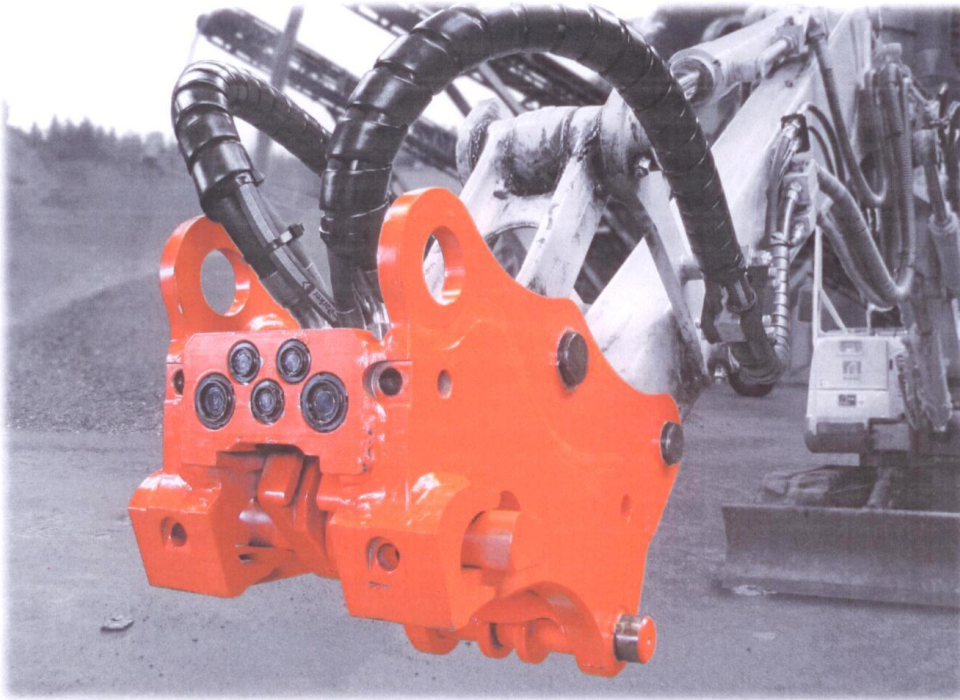

Changing hydraulic attachments in one step

Tool change with highest speed and a maximum of comfort

For attachments with and without hydraulic functions, buckets reversible

Attachments with W-Lock adapter can be used without conversion

Separate connector for leakage line (5 resp. 6 connectors integrated)

Automatic pressure release

Hydraulic power reversal - no jam when opening

Double operating wedge prevents looseness between coupler and tool

For excavators up to 18 tons



Quality without Compromise.



Technical details


Advantages

Wimmer quality in material (Hardox 450) and workmanship.

Shaft and wedge inductively hardened

Automatic protection cover for the couplers

No mechanical safeguard needed

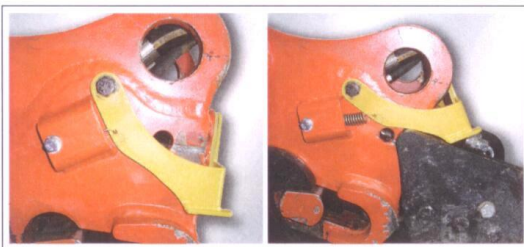

Safety-Box with
acoustic locking control

APPROVED SAFETY

ISO 9001
CERTIFIED

CE CONFORM WITH THE
EUROPEAN STANDARD

Models/sizes available:

Model	OMX 250	OMX 350
Carrier weight, to*	6 - 12	10 - 18
Coupler weight app.	120 kg	170 kg
Ø of connectors	2 x 3/4", 3 x 3/8"	3 x 3/4", 3 x 3/8"

* This classification is only a rough recommendation, weights depend on individual parameters too.



All rights and errors reserved.

Version 0608

WIMMER Hartstahl GmbH & Co. KG und WIMMER Felstechnik GmbH.
Industriestraße 3, A-5303 Thalgau, AUSTRIA, Tel.: +43 (0)6235 6655 0, Fax.: +43 (0)6235 6655 18
WIMMER Canada Inc., 9999, Boul. Parkway, Anjou, (QC) CANADA H1J 1P7, Tel.: + 514 355 64 24
Wimmer International CZ s.r.o., Rudolfovská 170 a, 370 01 České Budějovice, Tel.: +420 387 203 735, Fax +420 387 203 736

www.wimmer.info office@wimmer.info

Auth. WIMMER-Dealer:



Quality without Compromise.